

ORIGINAL

Application Based on

Docket **83727D-W**

Inventors: Mark Leiental, Charles Chester Anderson, John Michael  
Pochan, James Llewlyn Wakley and James Frank Elman  
Customer No. 01333

**COMPOSITION CONTAINING ELECTRONICALLY-CONDUCTIVE  
PARTICLES**

Commissioner for Patents,  
ATTN: BOX PATENT APPLICATION  
Washington, D. C. 20231

Express Mail Label No.: EL656967025US

Date: December 26, 2001

## COMPOSITION CONTAINING ELECTRONICALLY CONDUCTIVE POLYMER PARTICLES

5

### CROSS REFERENCE TO RELATED APPLICATIONS

This application relates to commonly assigned copending application Serial No. \_\_\_\_\_ (Docket No. 83302), filed simultaneously herewith. This copending application is incorporated by reference herein for all that they contain.

10

### FIELD OF THE INVENTION

This invention relates in general to electronically conductive compositions for imaging elements, such as photographic, electrostatographic, and thermal imaging elements containing one or more conductive antistatic layers. In particular, the invention relates to electronically conductive compositions for imaging elements that comprise a support, an image-forming layer and an electronically-conductive antistatic layer comprising specific conductive polymeric particles. This invention is directed to imaging sciences in general and to photography, thermography, and photothermography more specifically.

15

20

### BACKGROUND OF THE INVENTION

Problems associated with the generation and discharge of electrostatic charge during the manufacture and use of photographic films and paper products have been recognized for many years by the photographic industry. The accumulation of static charge on film or paper surfaces can cause irregular static marking fog patterns in the emulsion layer. The presence of static charge also can lead to difficulties in support conveyance as well as the attraction of dust that can result in, fog, desensitization, and other physical defects during emulsion coating. The discharge of accumulated charge during or after the application of the imaging emulsion layer(s) also can produce irregular fog

25

30

patterns or "static marks" in the emulsion layer. The severity of static-related problems has been exacerbated greatly by increases in the sensitivity of new emulsions, increases in coating machine speeds, and increases in post-coating drying efficiency.

5           The generation of electrostatic charge during the coating process results primarily from the tendency of webs to undergo triboelectric charging during winding and unwinding operations, during conveyance through the coating machines, and during finishing operations such as slitting and spooling.

10           Static charge can also be generated during the use of the final photographic film product. In an automatic camera, the winding of roll film out of and back into the film cassette, especially in a low relative humidity environment, can result in static charging and marking. Similarly, high-speed automated film processing equipment can produce static charging resulting in marking. Sheet films are especially subject to static charging during use in  
15           automated high-speed film cassette loaders (for example, radiographic and graphic arts films).

              It is widely known and accepted that accumulated electrostatic charge can be dissipated effectively by incorporating one or more electrically conductive "antistatic" layers into the overall film structure. Antistatic layers can  
20           be applied to one or to both sides of the film support as subbing layers either underlying or on the side opposite to the sensitized emulsion layer. Alternatively, an antistatic layer can be applied as the bottom layers, intermediate layers, or outermost coated layer either over the emulsion layers (that is, as an overcoat), or on the side of the film support opposite to the emulsion layers (that is, as a back  
25           coat) or both.

              A wide variety of electrically conductive materials can be incorporated in antistatic layers to produce a broad range of surface conductivities. Many of the traditional antistatic layers used for photographic applications employ materials that exhibit predominantly ionic conductivity.  
30           Antistatic compositions containing simple inorganic salts, alkali metal salts of

surfactants, alkali metal ion-stabilized colloidal metal oxide sols, ionic conductive polymers or polymeric electrolytes containing alkali metal salts and the like have been taught in the art. The electrical conductivities of such ionic conductors are typically strongly dependent on the temperature and relative humidity of the surrounding environment. At low relative humidity and low temperatures, the diffusion mobility of the charge carrying ions are greatly reduced and the bulk conductivity is substantially decreased. At high relative humidity, an exposed antistatic back coating can absorb water, swell, and soften. Especially in the case of roll films, this can result in a loss of adhesion between layers as well as physical transfer of portions of the back coating to the emulsion side of the film (viz. blocking). Also, many of the inorganic salts, polymeric electrolytes, and low molecular weight surface-active agents typically used in such antistatic layers are water soluble and can be leached out during film processing, resulting in a loss of antistatic function.

One of the methods proposed in the art for increasing the electrical conductivity of the surface of photographic light-sensitive materials in order to dissipate accumulated electrostatic charge involves the incorporation of at least one of a wide variety of surfactants or coating aids in the outermost (surface) protective layer overlying the emulsion layer(s). A wide variety of ionic-type surfactants have been evaluated as antistatic agents including anionic, cationic, and betaine-based surfactants of the type described. The use of nonionic surfactants having at least one polyoxyethylene group as antistatic agents is also known. Further, surface protective layers containing nonionic surfactants having at least two polyoxyethylene groups are known.

In order to provide improved performance, the incorporation of an anionic surfactant having at least one polyoxyethylene group in combination with a nonionic surfactant having at least one polyoxyethylene group in the surface layer was disclosed in U.S. Patent 4,649,102. A further improvement in antistatic performance by incorporating a fluorine-containing ionic surfactant having a polyoxyethylene group into a surface layer containing either a nonionic surfactant

having at least one polyoxyethylene group or a combination of nonionic and anionic surfactants having at least one polyoxyethylene group was disclosed in U.S. Patents 4,510,233 and 4,649,102. Additionally, surface or backing layers comprising a combination of specific cationic and anionic surfactants having at least one polyoxyethylene group in each which form a water-soluble or dispersible complex with a hydrophilic colloid binder are disclosed in European Patent Publication 650,088 and British Patent Publication 2,299,680 to provide good antistatic properties both before and after processing without dye staining.

Surface layers containing either non-ionic or anionic surfactants having polyoxyethylene groups often demonstrate specificity in their antistatic performance such that good performance can be obtained against specific supports and photographic emulsion layers but poor performance results when they are used with others. Surface compositions containing fluorine-containing ionic surfactants of the type described in U.S. Patent 3,589,906, 3,666,478, 3,754,924, 3,775,236, and 3,850,642, British Patent 1,293,189, 1,259,398, 1,330,356, and 1,524,631 generally exhibit negatively charged triboelectrification when brought into contact with various materials. Such fluorine-containing ionic surfactants exhibit variability in triboelectric charging properties after extended storage, especially after storage at high relative humidity.

However, it is possible to reduce triboelectric charging from contact with specific materials by incorporating into a surface composition other surfactants which exhibit positively charged triboelectrification against these specific materials. The dependence of the triboelectrification properties of a surface layer on those specific materials with which it is brought into contact can be somewhat reduced by adding a large amount of fluorine-containing nonionic surfactants of the type disclosed in U.S. Patent 4,175,969.

However, the use of a large amount of said fluorine-containing surfactants results in decreased emulsion sensitivity, increased tendency for blocking, and increased dye staining during processing. Thus, it is extremely difficult to minimize the level of triboelectric charging against all those materials

with which an imaging element may come to contact without seriously degrading other requisite performance characteristics of the imaging element.

The inclusion in a surface or backing layer of a combination of three kinds of surfactants, comprising at least one fluorine-containing nonionic surfactant, and at least one fluorine-containing ionic surfactant, and a fluorine-free nonionic surfactant has been disclosed in U.S. Patent 4,891,307 to reduce triboelectric charging, prevent dye staining on processing, maintain antistatic properties on storage, and preserve sensitometric properties of the photosensitive emulsion layer. The level of triboelectric charging of surface or backing layers containing said combination of surfactants against dissimilar materials (for example, rubber and nylon) is alleged to be such that little or no static marking of the sensitized emulsion occurs. The incorporation of another antistatic agent such as colloidal metal oxide particles of the type described in U.S. Patents 3,062,700 and 3,245,833 into the surface layer containing said combination of surfactants was also disclosed in U.S. Patent 4,891,307.

The use of a hardened gelatin-containing conductive surface layer containing a soluble antistatic agent (for example TERGITOL™ 15-S-7), an aliphatic sulfonate-type surfactant (for example HOSTAPUR™ SAS-93), a matting agent (for example silica, titania, zinc oxide, and polymeric beads), and a friction-reducing agent (for example Slip-Ayd SL-530) for graphic arts and medical x-ray films has been taught in U.S. Patent 5,368,894.

Further, a method for producing such a multilayered photographic element in which the conductive surface layer is applied in tandem with the underlying sensitized emulsion layer(s) is also claimed in U.S. Patent 5,368,894. A surface protective layer comprising a composite matting agent consisting of a polymeric core particle surrounded by a layer of colloidal metal oxide particles and optionally, conductive metal oxide particles and a nonionic, anionic or cationic surfactant has been disclosed in U.S. Patent 5,288,598.

An electroconductive protective overcoat overlying a sensitized silver halide emulsion layer of a black-and white photographic element

comprising at least two layers both containing granular conductive metal oxide particles and gelatin but at different metal oxide particle-to-gelatin weight ratios has been taught in Japanese Kokai 63-063035. The outermost layer of said protective layer contains a substantially lower total dry coverage of conductive metal oxide (for example,  $0.75 \text{ g/m}^2$  compared to  $2.5 \text{ g/m}^2$ ) present at a lower metal oxide particle-to-gel weight ratio (e.g., 2:1 vs 4:1) than that of the innermost conductive layer.

Antistatic compositions incorporating electronic rather than ionic conductors also have been described extensively in the art. Because the electrical conductivity of such compositions depends primarily on electronic mobility rather than on ionic mobility, the observed conductivity is independent of relative humidity and only slightly influenced by ambient temperature. Antistatic compositions containing conjugated conductive polymers, conductive carbon particles, crystalline semiconductor particles, amorphous semiconductive fibrils, and continuous semiconductive thin films or networks are well known in the art. Of the various types of electronic conductors previously described, electroconductive metal-containing particles, such as semiconductive metal oxide particles, are particularly effective. Fine particles of crystalline metal oxides doped with appropriate donor heteroatoms or containing oxygen deficiencies are sufficiently conductive when dispersed with polymeric film-forming binders to be used to prepare optically transparent, humidity insensitive, antistatic layers useful for a wide variety of imaging applications, as disclosed in for example U.S. Patents 4,275,103, 4,416,963, 4,495,276, 4,394,441, 4,418,141, 4,431,764, 4,495,276, 4,571,361, 4,999,276, 5,122,445, 5,294,525, 5,368,995, 5,382,494, and 5,459,021. Suitable claimed conductive metal oxides include zinc oxide, titania, tin oxide, alumina, indium oxide, zinc and indium antimonates, silica, magnesia, zirconia, barium oxide, molybdenum trioxide, tungsten trioxide, and vanadium pentoxide. Of these, the semiconductive metal oxide most widely used in conductive layers for imaging elements is a crystalline antimony-doped tin

oxide, especially with a preferred antimony dopant level between 0.1 and 10 atom percent Sb (for  $Sb_xSn_{1-x}O_2$ ) as disclosed in U.S. Patent 4,394,441.

Electronically conductive polymers have recently received attention from various industries because of their electronic conductivity.

- 5 Although many of these polymers are highly colored and are less suited for photographic applications, some of these electronically conductive polymers, such as substituted or unsubstituted pyrrole-containing polymers (as mentioned in U.S. Patents 5,665,498 and 5,674,654), substituted or unsubstituted thiophene-containing polymers (as mentioned in U.S. Patents 5,300,575, 5,312,681,  
10 5,354,613, 5,370,981, 5,372,924, 5,391,472, 5,403,467, 5,443,944, 5,575,898, 4,987,042, and 4,731,408) and substituted or unsubstituted aniline-containing polymers (as mentioned in U.S. Patents 5,716,550, 5,093,439, and 4,070,189) are transparent and not prohibitively colored, at least when coated in thin layers at moderate coverage. Because of their electronic conductivity instead of ionic  
15 conductivity, these polymers are conducting even at low humidity. Moreover, some of these polymers can retain sufficient conductivity even after wet chemical processing to provide what is known in the art as "process-surviving" antistatic characteristics to the photographic support they are applied. Unlike metal-containing semi-conducting particulate antistatic materials (e.g., antimony-doped  
20 tin oxide), the aforementioned electronically conductive polymers are less abrasive and environmentally more acceptable (due to absence of heavy metals).

- U.S. Patent 5,312,681 describes a thiophene-containing antistatic layer having an overlying barrier layer, and onto the said barrier layer is applied an adhesion promoting hydrophilic colloid layer. Reportedly, this combination of  
25 3 layers provides effective antistatic protection and adhesion to overlying hydrophilic colloid layers such as photographic emulsion layers. U.S. Patent 6,077,655 describes hydrophilic antistatic compositions containing an electronically conductive polymer and a modified gelatin that is a graft copolymer of gelatin and a vinyl polymer having acid functionality. The said modified



gelatin is used rather than conventional gelatin in order to achieve effective antistatic performance.

The use of electroconductive antimony-doped tin oxide granular particles in combination with at least one fluorine-containing surfactant in a surface, overcoat or backing layer has been disclosed broadly in U.S. Patents 4,495,276, 4,999,276, 5,122,445, 5,238,801, 5,254,448, and 5,378,577 and also in Japanese Kokai 07-020,610 and Japanese Kokoku 91-024,656B1. Such fluorine-containing surfactants are preferably located in the same layer as the electroconductive tin oxide particles to provide improved antistatic performance.

A surface protective layer or a backing layer comprising at least one fluorine-containing surfactant, at least one nonionic surfactant having at least one polyoxyethylene group, and optionally one or both of electroconductive metal oxide granular particles or a conductive polymer or conductive latex is disclosed in U.S. Patent 5,582,959.

As indicated herein above, the art discloses a wide variety of antistatic layer compositions. However, there is still a critical need in the art for electrically conductive, hydrophilic antistatic compositions that effectively facilitate dissipation of accumulated electrostatic charge, but also minimize triboelectric charging against a wide variety of materials with which the imaging element may come into contact. In addition to providing superior antistatic performance, the antistatic layers also must be highly transparent, resist the effects of humidity change, strongly adhere to adjacent layers, particularly hydrophilic layers such as photographic emulsion layers, exhibit suitable dynamic and static wettability, not exhibit ferrotyping or blocking, not exhibit adverse sensitometric effects, and still be manufacturable at a reasonable cost.

It is toward the objective of providing such improved electrically conductive, antistatic compositions that more effectively meet the diverse needs of imaging elements, especially of silver halide photographic films, than those of the prior art that the present invention is directed.


### SUMMARY OF THE INVENTION

In accordance with this invention, an antistatic composition for use in imaging elements in an image-forming process comprises particles of electronically-conductive polymer dispersed in a film-forming hydrophilic binder.

- 5 The addition of a neutral charge conductivity enhancing agent can provide improved conductivity for antistatic layers made from said compositions. The composition of this invention can be coated on any of a very wide variety of supports. Use of an electronically-conductive polymer-neutral charge conductivity enhancer combination dispersed in a suitable film-forming, hydrophilic, polymeric binder enables the preparation of a thin, highly
- 10 conductive, transparent layer which is strongly adherent to photographic supports as well as to overlying layers such as emulsion layers, pelloids, topcoats, backcoats, and the like. The electrical conductivity provided by the composition of this invention is independent of relative humidity and persists even after
- 15 exposure to aqueous solutions with a wide range of pH values such as are encountered in the processing of photographic elements. As hereinafter described in full detail, it has been discovered that compositions containing doped electronically conductive polymer-hydrophilic binder provide superior performance when used as electrically-conductive antistatic subbing layers for a
- 20 wide variety of imaging elements.

- The present invention provides aqueous mixtures of an electronically conductive polymer, a neutral charge conductivity enhancer and a hydrophilic polymeric binder. These aqueous formulations can be applied as thin coatings to the substrate and dried to form transparent electrically conducting
- 25 antistatic subbing layers. Preferred electronically conductive polymers include polypyrrole/poly (styrene sulfonic acid), 3,4-dialkoxy substituted polypyrrole styrene sulfonate, and 3,4-dialkoxy substituted polythiophene styrene sulfonate.

Especially preferred electronically conductive polymers are polythiophenes of formula (I).



5 Polythiophenes formula (I)

wherein R<sub>1</sub> and R<sub>2</sub> are independently hydrogen or a substituted or unsubstituted alkyl group having 1 to 4 carbon atoms, or together form a substituted or  
10 unsubstituted group or a substituted or unsubstituted 1,2-cyclohexylene group.

The neutral charge conductivity enhancers of this invention include organic compounds containing dihydroxy or poly-hydroxy and/or carboxyl groups or amide groups or lactam groups.

## 15 DETAILED DESCRIPTION OF THE INVENTION

The method for preparing the noted composition for electrically conductive compositions in accordance with this invention comprises preparing a stable aqueous colloidal dispersion of one or more electronically conductive polymeric materials. Preferably, such colloidal dispersions are combined with at  
20 least one neutral charge conductivity enhancer, one or more polymeric film-forming binders, thickeners, and other additives. The composition may be incorporated in an imaging element in the form of a thin antistatic subbing layer.

The electronically conductive polymer particles can be coated out of aqueous coating compositions. The polymers can be chosen from any or a  
25 combination of electronically conductive polymers, such as substituted or unsubstituted pyrrole-containing polymers (as mentioned for example, in U.S.

Patents 5,665,498 and 5,674,654), substituted or unsubstituted thiophene-containing polymers (as mentioned for example, in U.S. Patents 5,300,575, 5,312,681, 5,354,613, 5,370,981, 5,372,924, 5,391,472, 5,403,467, 5,443,944, 5,575,898, 4,987,042, and 4,731,408), and substituted or unsubstituted aniline-containing polymers (as mentioned for example, in U.S. Patents 5,716,550, 5,093,439, and 4,070,189).

Polyanions used in these electronically conductive polymers include the anions of polymeric carboxylic acids such as polyacrylic acids, poly(methacrylic acid), and poly(maleic acid), and polymeric sulfonic acids such as polystyrenesulfonic acids and polyvinylsulfonic acids, the polymeric sulfonic acids being preferred for use in this invention. These polycarboxylic and polysulfonic acids may also be copolymers formed from vinylcarboxylic and vinylsulfonic acid monomers copolymerized with other polymerizable monomers such as the esters of acrylic acid and styrene. The molecular weight of the polyacids providing the polyanions preferably is 1,000 to 2,000,000 and more preferably 2,000 to 500,000. The polyacids or their alkali salts are commonly available, for example as polystyrenesulfonic acids and polyacrylic acids, or they may be produced using known methods. Instead of the free acids required for the formation of the electronically conducting polymers and polyanions, mixtures of alkali salts of polyacids and appropriate amounts of monoacids may also be used.

Preferred electronically conductive polymers include polypyrrole/poly (styrene sulfonic acid), 3,4-dialkoxy substituted polypyrrole styrene sulfonate, and 3,4-dialkoxy substituted polythiophene styrene sulfonate. The electronically conductive polymer particles exhibit a packed powder specific resistivity of  $10^5$  ohm-cm or less; have a mean diameter of 0.5  $\mu\text{m}$  or less, preferably 0.1  $\mu\text{m}$  or less.

The electronically conductive polymers may be soluble or dispersible in organic solvents or water or mixtures thereof. For environmental reasons, aqueous systems are preferred. While the electronically conductive polymer particles can be used without a binder in the various antistatic

compositions, preferably, they are dispersed in one or more hydrophilic polymeric, film-forming, binders. In such embodiments, the volume fraction of electronically conductive polymer is preferably in the range of from 5 to 95% of the weight of the polymer particle/binder combination. Preferably, the weight % of polymeric particles is from 10 to 90%. The use of significantly less than 5 weight % polymer particles will not provide a useful level of surface electrical conductivity. The optimum volume ratio of polymer particles to film-forming polymer binder varies depending on the electrical properties of the polymer, binder type, type of neutral charge conductivity enhancer, and conductivity requirements of the particular image-forming material. The choice of the particular neutral charge conductivity enhancer to be used with the electronically conductive polymer in the antistatic composition can be advantageous to the benefits provided by the present invention. The combination of neutral charge conductivity enhancer and electronically conductive polymer can be optimized so as to provide a maximum level of conductivity and a maximum efficiency of electrostatic charge dissipation. Typically, the concentration of the neutral charge conductivity enhancer in the antistatic layer coating solution is from 0.02 weight % to 20 weight % and preferably from 0.3 weight % to 3 weight %. The neutral-charge conductivity enhancer is present in the antistatic composition in an amount of from 0.02 to 90 weight %, based on the total weight coverage of the antistatic composition.

Polymeric film-forming hydrophilic binders useful in compositions for electrically conductive compositions according to this invention can include, but are not limited to, water-soluble or water-dispersible hydrophilic polymers such as gelatin, gelatin derivatives, maleic acid anhydride copolymers, cellulose derivatives (such as carboxymethyl cellulose, hydroxyethyl cellulose, cellulose acetate butyrate, diacetyl cellulose, and triacetyl cellulose), synthetic hydrophilic polymers (such as polyvinyl alcohol, poly-N-vinylpyrrolidone, acrylic acid copolymers, polyacrylamide, their derivatives and partially hydrolyzed products and other hydrophilic synthetic resins that would be readily apparent to one

skilled in the imaging arts. Gelatin and gelatin derivatives are the preferred binders in the practice of this invention.

The neutral charge conductivity enhancers for this invention include organic compounds containing dihydroxy or poly-hydroxy and/or  
 5 carboxyl groups or amide groups or lactam groups. Suitable organic compounds containing dihydroxy or polyhydroxy and/or carboxyl groups or amide groups correspond to formula (II)



10 wherein

n and m are independent of one another and denote an integer from 1 to 20, preferably from 2 to 8 and R denotes a linear, branched or cyclic alkylene radical having 2 to 20 C atoms or an optionally substituted arylene radical having 6 to 14 C atoms or a heterocyclic radical having 4 to 10 C atoms or a sugar radical or  
 15 sugar alcohol radical and x denotes --OH or --NYZ, wherein Y, Z independently of one another represent hydrogen or alkyl, preferably hydrogen or C<sub>1</sub> to C<sub>12</sub>-alkyl. Examples of suitable organic compounds containing lactam groups are N-methylpyrrolidone, pyrrolidone, caprolactam, N-methylcaprolactam, N-octylpyrrolidone.

20 Particularly preferred neutral charge conductivity enhancers are: sugar and sugar derivatives such as sucrose, glucose, fructose, lactose; sugar alcohols such as sorbitol, mannitol; furan derivatives such as 2-furancarboxylic acid, 3-furancarboxylic acid; alcohols such as ethylene glycol, glycerol, di- or triethylene glycol. U.S. Patents 5,766,515, 6,083,635, and 6,197,418 describe  
 25 electroconductive layers containing electronically conductive polythiophene and organic compounds containing polyhydroxy, carboxyl, amide, or lactam groups. Such compositions are reported to be useful in the preparation of electrodes for displays or other semiconductor devices. These patents do not discuss the incorporation of hydrophilic colloids in such compositions nor do they teach or

suggest the preparation of hydrophilic antistatic compositions that are useful for applications in photographic elements.

Solvents useful for preparing dispersions and coatings of electronically conductive polymer particles for this invention include, but are not limited to water, alcohols (such as methanol, ethanol, propanol, and isopropanol), ketones (such as acetone, methyl ethyl ketone, and methyl isobutyl ketone), esters such as methyl acetate and ethyl acetate, glycol ethers such as methyl cellosolve, ethyl cellosolve), and mixtures of any of these solvents. Preferred solvents include water, alcohols, and acetone.

In addition to binders and solvents, other components that are well known in the photographic art may also be included in the electrically conductive compositions used in this invention. Such addenda include but are not limited to matting agents, surfactants or coating aids, polymer lattices to improve dimensional stability, thickeners or viscosity modifiers, hardeners or crosslinking agents, soluble antistatic agents, soluble and/or solid particle dyes, antifoggants, lubricating agents, and various other conventional additives readily apparent to one skilled in the art.

Antistatic compositions of the invention can be applied to a variety of supports. Typical photographic film supports are preferred and include but are not limited to, cellulose nitrate, cellulose acetate, cellulose acetate butyrate, cellulose acetate propionate, poly(vinyl acetal), poly(carbonate), poly(styrene), poly(ethylene terephthalate), poly(ethylene naphthalate), poly(ethylene terephthalate), and poly(ethylene naphthalate) having included therein a portion of isophthalic acid, 1,4-cyclohexane dicarboxylic acid or 4,4-biphenyl dicarboxylic acid used in the preparation of the film support; polyesters wherein other glycols are employed such as, for example, cyclohexanedimethanol, 1,4-butanediol, diethylene glycol, polyethylene glycol, ionomers as described in U.S. Patent 5,138,024, incorporated herein by reference (such as polyester ionomers prepared using a portion of the diacid in the form of 5-sodiosulfo-1,3-isophthalic acid or like ion containing monomers), polycarbonates, and blends or laminates of the

above noted polymers. Preferred photographic film supports are cellulose acetate, poly(ethylene terephthalate), and poly(ethylene naphthalate), and most preferably poly(ethylene naphthalate) that is prepared from 2,6-naphthalene dicarboxylic acids or derivatives thereof.

- 5                   Electrically-conductive polymer/neutral charge conductivity enhancer/hydrophilic binder formulations can be prepared in the presence of appropriate levels of optional dispersing aids, colloidal stabilizing agents or polymeric co-binders by any of various mechanical stirring, mixing, homogenization or blending processes. Stable colloidal dispersions of suitable
- 10   electronically conductive polymer particles can be obtained commercially, for example, a stabilized dispersion of thiophene-containing polymer supplied by Bayer Corporation as Baytron P™.

- Coating formulations containing electronically-conductive polymer particles, neutral charge conductivity enhancer, polymeric hydrophilic binder(s),
- 15   and additives can be applied to the aforementioned film or paper supports by any of a variety of well-known coating methods. Hand coating techniques include using a coating rod or knife or a doctor blade. Machine coating methods include air doctor coating, reverse roll coating, gravure coating, curtain coating, bead coating, slide hopper coating, extrusion coating, spin coating and the like, and
- 20   other coating methods well known in the art.

- The electrically conductive antistatic composition of this invention can be applied to the support at any suitable coverage depending on the specific requirements of a particular type of imaging element. For example, for silver halide photographic films, dry coating weights of the antistatic layer are typically
- 25   in the range of from 0.01 to 1 g/m<sup>2</sup>. Preferably the dry coverage is in the range of from 0.03 to 0.5 g/m<sup>2</sup>. More preferably the dry coverage is in the range of from 0.04 to 0.25 g/m<sup>2</sup>. The electronically conductive polymer particles are present in the antistatic layer at a dry coverage of from 0.002 to 0.5 g/m<sup>2</sup>, preferably from 0.003 to 0.1 g/m<sup>2</sup>.



The compositions of this invention can be of many different types depending on the particular use for which they are intended. For example, the compositions of this invention can be used in imaging materials or elements including, for example, a non-silver halide imaging layer; a thermally imageable layer; a photosensitive, thermally developable layer; an electrophotographic imaging layer; a black-and-white photographic silver halide emulsion layer; a color photographic silver halide emulsion layer; a diffusion transfer donor or receiving layer; a black-and-white photographic film or paper; a black-and-white radiographic film; an infrared radiation sensitive imaging or scannable material; a color photographic color negative or reversal film, color motion picture film or print, an ink jet element a photographic color paper, dielectric recording, dye migration, and laser dye-ablation imaging elements.

Electrically conductive antistatic layers using the composition of the invention can be incorporated into multilayer imaging materials in any of various configurations depending upon the requirements of the specific application. An electrically conductive antistatic subbing layer can be applied on the front side directly under the sensitized image-forming layer(s), on the back side of the support opposite the image-forming layer(s), as well as on both sides of the support. When the electrically conductive layer is applied under an image-forming emulsion layer, it is not necessary to apply any intermediate layers such as barrier layers or adhesion-promoting layers between the conductive layer and the emulsion layer(s), although they can optionally be present.

Alternatively, an electrically conductive antistatic layer can be applied on the backside as part of or in addition to layers used to control curl (that is, a hydrophilic pelloid layer). In the case of photographic elements used for direct or indirect exposure to X-ray radiation, the electrically conductive antistatic layer can be applied on either or both sides of the support.

In some photographic materials, the electrically conductive antistatic layer is present on only one side of the support and one or more photosensitive emulsion layers are present on both sides of the support. In other

materials, one or more photosensitive emulsion layers are on only one side of the support and a pelloid layer that contains gelatin is on the backside of the support.

Electrically conductive antistatic layers coated with the composition of this invention can be incorporated under one or more  
5 photosensitive emulsion layer(s) or under pelloid layers, or both.

The transparent, electrically conductive antistatic layers described herein can be incorporated under the image-forming emulsion layer(s) or under the transparent magnetic recording layer on the backside of the support.

Imaging elements incorporating conductive layers of this invention  
10 useful for other specific imaging applications such as color negative films, color reversal films, black-and-white films, color and black-and-white papers, electrographic media, thermal dye transfer recording media, laser ablation media, and other imaging applications should be readily apparent to those skilled in photographic and other imaging arts.

The present invention is further illustrated by the following  
15 examples of its practice. In these examples, commercially available Baytron P™ aqueous dispersion of poly (3,4-ethylenedioxythiophene) poly(styrenesulfonate) (PDET/PSS) electronically conductive polymer from Bayer (Industrial Chemicals Division) was evaluated.

20  
EXAMPLE 1. A coating composition suitable for preparing an electrically-conductive layer was prepared by combining 173.9 g of demineralized water, 0.2 g gelatin, 0.3 g of a 1.0% aqueous solution of chrome alum (gelatin hardener), 0.19 g of a 10.6% aqueous coating aid solution (10G surfactant supplied by Olin  
25 Corp.), 0.22 g of a 2% aqueous dispersion of polymethylmethacrylate matte particles and 15.39 g of a 1.3% Baytron P™ aqueous dispersion of colloidal PDET/PSS. The above-described coating composition was applied with a coating hopper to a 4-mil thick polyethyleneterephthalate film support that had been previously coated with a vinylidene chloride/ acrylonitrile/itaconic acid  
30 terpolymer. The wet laydown of the coating composition applied to the film

support was 16.1 ml/m<sup>2</sup> which corresponds to a PDET/PSS dry weight coverage of 16.1 mg/m<sup>2</sup>. The surface electrical resistivity (SER) of the electrically-conductive layer was measured after conditioning for 24 hours at 5%, 20%, 50% or 70% R.H. using a two-probe parallel electrode method as described in U.S. Pat. 5 No. 2,801,191. Optical density of the electrically-conductive layer was measured using an X-Rite Model 361T densitometer. The values obtained for SER and net optical density (ortho) are reported in Table 1 below.

TABLE I

| Example #         | Baytron P to Gel | Dopant                  | Dopant Concentration | SER             | SER             | SER             | SER             | SER             | Optical Density |
|-------------------|------------------|-------------------------|----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
|                   | Ratio            |                         | (Coating Solution)   | log(ohm/square) | log(ohm/square) | log(ohm/square) | log(ohm/square) | log(ohm/square) |                 |
| Comparative Ex. 1 | 50/50            | None                    | 0                    | 8.3             | 8.5             | 8.6             | 8.8             | 8.8             | 0.007           |
| Comparative Ex. 2 | 40/60            | None                    | 0                    | 8.8             | 8.9             | 9.0             | 9.2             | 9.2             | 0.007           |
| Comparative Ex. 3 | 30/70            | None                    | 0                    | 9.4             | 9.6             | 9.82            | 9.9             | 9.9             | 0.007           |
| Comparative Ex. 4 | 25/75            | None                    | 0                    | 9.9             | 10.0            | 10.3            | 10.3            | 10.3            | 0.007           |
| Comparative Ex. 5 | 20/80            | None                    | 0                    | 10.6            | 10.9            | 11.0            | 11.2            | 11.2            | 0.007           |
| Comparative Ex. 6 | 15/85            | None                    | 0                    | 11.7            | 12.0            | 12.3            | 12.2            | 12.2            | 0.006           |
| Comparative Ex. 7 | 10 to 90         | None                    | 0                    | >14             | 13.1            | 13.9            | 12.6            | 12.6            | 0.006           |
| 8                 | 50/50/           | Glycerol                | 2                    | 5.9             | 4.9             | 4.9             | 4.9             | 4.9             | 0.005           |
| 9                 | 40/60            | Glycerol                | 2                    | 5.0             | 4.9             | 4.9             | 4.9             | 4.9             | 0.006           |
| 10                | 30/70            | Glycerol                | 2                    | 5.5             | 5.5             | 5.4             | 5.3             | 5.3             | 0.006           |
| 11                | 25/75            | Glycerol                | 2                    | 5.8             | 5.7             | 5.7             | 5.6             | 5.6             | 0.006           |
| 12                | 20/80            | Glycerol                | 2                    | 6.2             | 6.1             | 6.1             | 5.9             | 5.9             | 0.006           |
| 13                | 15/85            | Glycerol                | 2                    | 6.9             | 6.9             | 6.8             | 6.6             | 6.6             | 0.006           |
| 14                | 10 to 90         | Glycerol                | 2                    | 9.0             | 9.0             | 9.0             | 8.8             | 8.8             | 0.006           |
| 15                | 50/50            | Di(ethylene Glycol)     | 2                    | 5.0             | 4.9             | 4.9             | 5.0             | 5.0             | 0.006           |
| 16                | 40/60            | Di(ethylene Glycol)     | 2                    | 5.3             | 5.2             | 5.2             | 5.2             | 5.2             | 0.006           |
| 17                | 30/70            | Di(ethylene Glycol)     | 2                    | 5.6             | 5.6             | 5.6             | 5.5             | 5.5             | 0.006           |
| 18                | 25/75            | Di(ethylene Glycol)     | 2                    | 5.7             | 5.7             | 5.7             | 5.6             | 5.6             | 0.006           |
| 19                | 20/80            | Di(ethylene Glycol)     | 2                    | 6.0             | 6.0             | 6.0             | 5.9             | 5.9             | 0.006           |
| 20                | 15/85            | Di(ethylene Glycol)     | 2                    | 6.6             | 6.6             | 6.7             | 6.6             | 6.6             | 0.006           |
| 21                | 10 to 90         | Di(ethylene Glycol)     | 2                    | 9.2             | 9.2             | 9.5             | 9.4             | 9.4             | 0.006           |
| 22                | 50/50            | 2% N-methyl pyrrolidone | 2                    | 6.4             | 6.3             | 6.3             | 6.4             | 6.4             | 0.005           |
| 23                | 45/55            | 2% N-methyl pyrrolidone | 2                    | 6.5             | 6.4             | 6.5             | 6.4             | 6.4             | 0.005           |
| 24                | 40/60            | 2% N-methyl pyrrolidone | 2                    | 6.6             | 6.5             | 6.5             | 6.5             | 6.5             | 0.005           |
|                   | Baytron P to Gel | Dopant                  | Dopant Concentration | SER             | SER             | SER             | SER             | SER             | Optical Density |

| Example # | Ratio | (Coating Solution)      | log(ohm/square) | log(ohm/square) | log(ohm/square) | log(ohm/square) | log(ohm/square) |
|-----------|-------|-------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| 25        | 35/65 | 2% N-methyl pyrrolidone | 2               | 6.7             | 6.5             | 6.7             | 6.7             |
| 26        | 30/70 | 2% N-methyl pyrrolidone | 2               | 6.7             | 6.6             | 6.6             | 6.6             |
| 27        | 25/75 | 2% N-methyl pyrrolidone | 2               | 6.9             | 6.8             | 6.8             | 6.9             |
| 28        | 50/50 | Ethylene Glycol         | 0.1             | 7.6             | 7.7             | 7.9             | 8.1             |
| 29        | 50/50 | Ethylene Glycol         | 0.3             | 6.5             | 6.6             | 6.6             | 6.6             |
| 30        | 50/50 | Ethylene Glycol         | 1               | 5.0             | 5.0             | 5.0             | 5.0             |
| 31        | 50/50 | Ethylene Glycol         | 3               | 4.6             | 4.6             | 4.6             | 4.6             |
| 32        | 50/50 | Ethylene Glycol         | 10              | 4.6             | 4.6             | 4.6             | 4.6             |
| 33        | 50/50 | Di(ethylene Glycol)     | 0.1             | 7.5             | 7.6             | 7.7             | 8.0             |
| 34        | 50/50 | Di(ethylene Glycol)     | 0.3             | 6.5             | 6.4             | 6.5             | 6.6             |
| 35        | 50/50 | Di(ethylene Glycol)     | 1               | 5.4             | 5.3             | 5.4             | 5.5             |
| 36        | 50/50 | Di(ethylene Glycol)     | 3               | 4.7             | 4.7             | 4.6             | 4.7             |
| 37        | 50/50 | Di(ethylene Glycol)     | 10              | 4.8             | 4.7             | 4.8             | 4.7             |
| 38        | 50/50 | Glycerol                | 0.1             | 8.0             | 8.1             | 8.3             | 8.5             |
| 39        | 50/50 | Glycerol                | 0.3             | 6.9             | 7.0             | 7.0             | 7.1             |
| 40        | 50/50 | Glycerol                | 1               | 4.9             | 4.9             | 4.9             | 4.9             |
| 41        | 50/50 | Glycerol                | 3               | 4.9             | 4.8             | 4.8             | 4.9             |
| 42        | 50/50 | Glycerol                | 10              | 5.1             | 5.0             | 5.0             | 5.0             |
| 43        | 50/50 | N-methyl pyrrolidone    | 0.1             | 7.5             | 7.5             | 7.6             | 7.9             |
| 44        | 50/50 | N-methyl pyrrolidone    | 0.3             | 6.5             | 6.5             | 6.7             | 6.7             |
| 45        | 50/50 | N-methyl pyrrolidone    | 1               | 6.1             | 6.1             | 6.1             | 6.1             |
| 46        | 50/50 | N-methyl pyrrolidone    | 3               | 6.1             | 6.1             | 6.3             | 6.2             |

## Examples 2-46

Additional electrically-conductive coatings containing an organic neutral charge conductivity enhancer and(or) different Baytron P™ to gelatin ratio were prepared by incorporating a neutral charge conductivity enhancer at the concentration as reported in Table 1 and adjusting the amount of gelatin in the melt formulation to achieve Baytron P™ to gel ratio as reported in Table 1. Coatings were prepared as described in Example 1. The surface resistivities and net optical densities of these electrically-conductive layers were measured in the manner described above and are reported in Table 1.

As shown by the data in Table 1, the use of an organic compound neutral charge conductivity enhancer in the antistatic layer formulation in combination with Baytron P™ and gelatin provided significantly superior performance in terms of surface electrical resistivity compared with antistatic layer compositions containing only Baytron P™ and gelatin. To clearly indicate the improvement in conductivity achieved by this invention, the data in Table 1 relating SER to % Baytron P™ in the gelatin-based antistatic layer coated at the constant (16.1mg/m<sup>2</sup>) Baytron P™ coverage are plotted in FIG. 1 (Examples 1-21). The data plotted in FIG. 2 (Examples 5, 12, 19) represent an assessment of humidity dependence of surface resistivity (SER) for the selected formulations described in Table 1.

**Doped Baytron P**  
**(Baytron P - Type 4Gel)**  
**1.5mg Baytron / ft2**  
**2% Dopant**

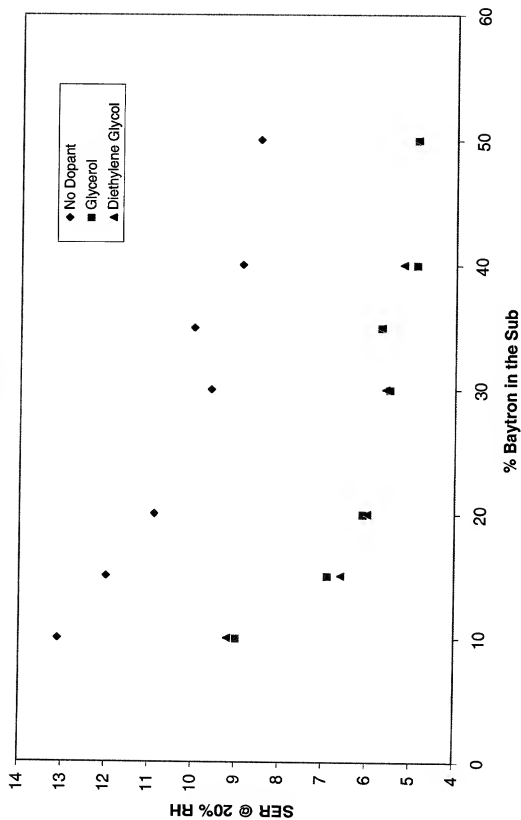


Fig. 1

Doped Baytron P  
(20% Baytron P - 80% Type 4Gel)  
1.5mg Baytron / ft2  
2% Dopant

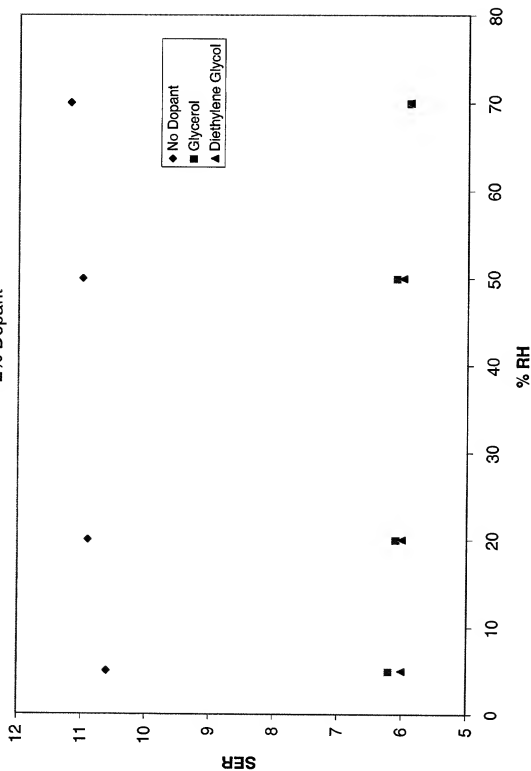


Fig. 2



The invention has been described in detail with particular reference to certain preferred embodiments thereof, but it will be understood that variations and modifications can be effected within the spirit and scope of the invention.

11  
22  
33  
44  
55  
66  
77  
88  
99  
1010  
1111  
1212  
1313  
1414  
1515  
1616  
1717  
1818  
1919  
2020  
2121  
2222  
2323  
2424  
2525  
2626  
2727  
2828  
2929  
3030  
3131  
3232  
3333  
3434  
3535  
3636  
3737  
3838  
3939  
4040  
4141  
4242  
4343  
4444  
4545  
4646  
4747  
4848  
4949  
5050  
5151  
5252  
5353  
5454  
5555  
5656  
5757  
5858  
5959  
6060  
6161  
6262  
6363  
6464  
6565  
6666  
6767  
6868  
6969  
7070  
7171  
7272  
7373  
7474  
7575  
7676  
7777  
7878  
7979  
8080  
8181  
8282  
8383  
8484  
8585  
8686  
8787  
8888  
8989  
9090  
9191  
9292  
9393  
9494  
9595  
9696  
9797  
9898  
9999  
100100  
101101  
102102  
103103  
104104  
105105  
106106  
107107  
108108  
109109  
110110  
111111  
112112  
113113  
114114  
115115  
116116  
117117  
118118  
119119  
120120  
121121  
122122  
123123  
124124  
125125  
126126  
127127  
128128  
129129  
130130  
131131  
132132  
133133  
134134  
135135  
136136  
137137  
138138  
139139  
140140  
141141  
142142  
143143  
144144  
145145  
146146  
147147  
148148  
149149  
150150  
151151  
152152  
153153  
154154  
155155  
156156  
157157  
158158  
159159  
160160  
161161  
162162  
163163  
164164  
165165  
166166  
167167  
168168  
169169  
170170  
171171  
172172  
173173  
174174  
175175  
176176  
177177  
178178  
179179  
180180  
181181  
182182  
183183  
184184  
185185  
186186  
187187  
188188  
189189  
190190  
191191  
192192  
193193  
194194  
195195  
196196  
197197  
198198  
199199  
200200  
201201  
202202  
203203  
204204  
205205  
206206  
207207  
208208  
209209  
210210  
211211  
212212  
213213  
214214  
215215  
216216  
217217  
218218  
219219  
220220  
221221  
222222  
223223  
224224  
225225  
226226  
227227  
228228  
229229  
230230  
231231  
232232  
233233  
234234  
235235  
236236  
237237  
238238  
239239  
240240  
241241  
242242  
243243  
244244  
245245  
246246  
247247  
248248  
249249  
250250  
251251  
252252  
253253  
254254  
255255  
256256  
257257  
258258  
259259  
260260  
261261  
262262  
263263  
264264  
265265  
266266  
267267  
268268  
269269  
270270  
271271  
272272  
273273  
274274  
275275  
276276  
277277  
278278  
279279  
280280  
281281  
282282  
283283  
284284  
285285  
286286  
287287  
288288  
289289  
290290  
291291  
292292  
293293  
294294  
295295  
296296  
297297  
298298  
299299  
300300  
301301  
302302  
303303  
304304  
305305  
306306  
307307  
308308  
309309  
310310  
311311  
312312  
313313  
314314  
315315  
316316  
317317  
318318  
319319  
320320  
321321  
322322  
323323  
324324  
325325  
326326  
327327  
328328  
329329  
330330  
331331  
332332  
333333  
334334  
335335  
336336  
337337  
338338  
339339  
340340  
341341  
342342  
343343  
344344  
345345  
346346  
347347  
348348  
349349  
350350  
351351  
352352  
353353  
354354  
355355  
356356  
357357  
358358  
359359  
360360  
361361  
362362  
363363  
364364  
365365  
366366  
367367  
368368  
369369  
370370  
371371  
372372  
373373  
374374  
375375  
376376  
377377  
378378  
379379  
380380  
381381  
382382  
383383  
384384  
385385  
386386  
387387  
388388  
389389  
390390  
391391  
392392  
393393  
394394  
395395  
396396  
397397  
398398  
399399  
400400  
401401  
402402  
403403  
404404  
405405  
406406  
407407  
408408  
409409  
410410  
411411  
412412  
413413  
414414  
415415  
416416  
417417  
418418  
419419  
420420  
421421  
422422  
423423  
424424  
425425  
426426  
427427  
428428  
429429  
430430  
431431  
432432  
433433  
434434  
435435  
436436  
437437  
438438  
439439  
440440  
441441  
442442  
443443  
444444  
445445  
446446  
447447  
448448  
449449  
450450  
451451  
452452  
453453  
454454  
455455  
456456  
457457  
458458  
459459  
460460  
461461  
462462  
463463  
464464  
465465  
466466  
467467  
468468  
469469  
470470  
471471  
472472  
473473  
474474  
475475  
476476  
477477  
478478  
479479  
480480  
481481  
482482  
483483  
484484  
485485  
486486  
487487  
488488  
489489  
490490  
491491  
492492  
493493  
494494  
495495  
496496  
497497  
498498  
499499  
500500  
501501  
502502  
503503  
504504  
505505  
506506  
507507  
508508  
509509  
510510  
511511  
512512  
513513  
514514  
515515  
516516  
517517  
518518  
519519  
520520  
521521  
522522  
523523  
524524  
525525  
526526  
527527  
528528  
529529  
530530  
531531  
532532  
533533  
534534  
535535  
536536  
537537  
538538  
539539  
540540  
541541  
542542  
543543  
544544  
545545  
546546  
547547  
548548  
549549  
550550  
551551  
552552  
553553  
554554  
555555  
556556  
557557  
558558  
559559  
560560  
561561  
562562  
563563  
564564  
565565  
566566  
567567  
568568  
569569  
570570  
571571  
572572  
573573  
574574  
575575  
576576  
577577  
578578  
579579  
580580  
581581  
582582  
583583  
584584  
585585  
586586  
587587  
588588  
589589  
590590  
591591  
592592  
593593  
594594  
595595  
596596  
597597  
598598  
599599  
600600  
601601  
602602  
603603  
604604  
605605  
606606  
607607  
608608  
609609  
610610  
611611  
612612  
613613  
614614  
615615  
616616  
617617  
618618  
619619  
620620  
621621  
622622  
623623  
624624  
625625  
626626  
627627  
628628  
629629  
630630  
631631  
632632  
633633  
634634  
635635  
636636  
637637  
638638  
639639  
640640  
641641  
642642  
643643  
644644  
645645  
646646  
647647  
648648  
649649  
650650  
651651  
652652  
653653  
654654  
655655  
656656  
657657  
658658  
659659  
660660  
661661  
662662  
663663  
664664  
665665  
666666  
667667  
668668  
669669  
670670  
671671  
672672  
673673  
674674  
675675  
676676  
677677  
678678  
679679  
680680  
681681  
682682  
683683  
684684  
685685  
686686  
687687  
688688  
689689  
690690  
691691  
692692  
693693  
694694  
695695  
696696  
697697  
698698  
699699  
700700  
701701  
702702  
703703  
704704  
705705  
706706  
707707  
708708  
709709  
710710  
711711  
712712  
713713  
714714  
715715  
716716  
717717  
718718  
719719  
720720  
721721  
722722  
723723  
724724  
725725  
726726  
727727  
728728  
729729  
730730  
731731  
732732  
733733  
734734  
735735  
736736  
737737  
738738  
739739  
740740  
741741  
742742  
743743  
744744  
745745  
746746  
747747  
748748  
749749  
750750  
751751  
752752  
753753  
754754  
755755  
756756  
757757  
758758  
759759  
760760  
761761  
762762  
763763  
764764  
765765  
766766  
767767  
768768  
769769  
770770  
771771  
772772  
773773  
774774  
775775  
776776  
777777  
778778  
779779  
780780  
781781  
782782  
783783  
784784  
785785  
786786  
787787  
788788  
789789  
790790  
791791  
792792  
793793  
794794  
795795  
796796  
797797  
798798  
799799  
800800  
801801  
802802  
803803  
804804  
805805  
806806  
807807  
808808  
809809  
810810  
811811  
812812  
813813  
814814  
815815  
816816  
817817  
818818  
819819  
820820  
821821  
822822  
823823  
824824  
825825  
826826  
827827  
828828  
829829  
830830  
831831  
832832  
833833  
834834  
835835  
836836  
837837  
838838  
839839  
840840  
841841  
842842  
843843  
844844  
845845  
846846  
847847  
848848  
849849  
850850  
851851  
852852  
853853  
854854  
855855  
856856  
857857  
858858  
859859  
860860  
861861  
862862  
863863  
864864  
865865  
866866  
867867  
868868  
869869  
870870  
871871  
872872  
873873  
874874  
875875  
876876  
877877  
878878  
879879  
880880  
881881  
882882  
883883  
884884  
885885  
886886  
887887  
888888  
889889  
890890  
891891  
892892  
893893  
894894  
895895  
896896  
897897  
898898  
899899  
900900  
901901  
902902  
903903  
904904  
905905  
906906  
907907  
908908  
909909  
910910  
911911  
912912  
913913  
914914  
915915  
916916  
917917  
918918  
919919  
920920  
921921  
922922  
923923  
924924  
925925  
926926  
927927  
928928  
929929  
930930  
931931  
932932  
933933  
934934  
935935  
936936  
937937  
938938  
939939  
940940  
941941  
942942  
943943  
944944  
945945  
946946  
947947  
948948  
949949  
950950  
951951  
952952  
953953  
954954  
955955  
956956  
957957  
958958  
959959  
960960  
961961  
962962  
963963  
964964  
965965  
966966  
967967  
968968  
969969  
970970  
971971  
972972  
973973  
974974  
975975  
976976  
977977  
978978  
979979  
980980  
981981  
982982  
983983  
984984  
985985  
986986  
987987  
988988  
989989  
990990  
991991  
992992  
993993  
994994  
995995  
996996  
997997  
998998  
999999  
10001000  
10011001  
10021002  
10031003  
10041004  
10051005  
10061006  
10071007  
10081008  
10091009  
10101010  
10111011  
10121012  
10131013  
10141014  
10151015  
10161016  
10171017  
10181018  
10191019  
10201020  
10211021  
10221022  
10231023  
10241024  
10251025  
10261026  
10271027  
10281028  
10291029  
10301030  
10311031  
10321032  
10331033  
10341034  
10351035  
10361036  
10371037  
10381038  
10391039  
10401040  
10411041  
10421042  
10431043  
10441044  
10451045  
10461046  
10471047  
10481048  
10491049  
10501050  
10511051  
10521052  
10531053  
10541054  
10551055  
10561056  
10571057  
10581058  
10591059  
10601060  
10611061  
10621062  
10631063  
10641064  
10651065  
10661066  
10671067  
10681068  
10691069  
10701070  
10711071  
10721072  
10731073  
10741074  
10751075  
10761076  
10771077  
10781078  
10791079  
10801080  
10811081  
10821082  
10831083  
10841084  
10851085  
10861086  
10871087  
10881088  
10891089  
10901090  
10911091  
10921092  
10931093  
10941094  
10951095  
10961096  
10971097  
10981098  
10991099  
11001100  
11011101  
11021102  
11031103  
11041104  
11051105  
11061106  
11071107  
11081108  
11091109  
11101110  
11111111  
11121112  
11131113  
11141114  
11151115  
11161116  
11171117  
11181118  
11191119  
11201120  
11211121  
11221122  
11231123  
11241124  
11251125  
11261126  
11271127  
11281128  
11291129  
11301130  
11311131  
11321132  
11331133  
11341134  
11351135  
11361136  
11371137  
11381138  
11391139  
11401140  
11411141  
11421142  
11431143  
11441144  
11451145  
11461146  
11471147  
11481148  
11491149  
11501150  
11511151  
11521152  
11531153  
11541154  
11551155  
11561156  
11571157  
11581158  
11591159  
11601160  
11611161  
11621162  
11631163  
11641164  
11651165  
11661166  
11671167  
11681168  
11691169  
11701170  
11711171  
11721172  
11731173  
11741174  
11751175  
11761176  
11771177  
11781178  
11791179  
11801180  
11811181  
11821182  
11831183  
11841184  
11851185  
11861186  
11871187  
11881188  
11891189  
11901190  
11911191  
11921192  
11931193  
11941194  
11951195  
11961196  
11971197  
11981198  
11991199  
12001200  
12011201  
12021202  
12031203  
12041204  
12051205  
12061206  
12071207  
12081208  
12091209  
12101210  
12111211  
12121212  
12131213  
12141214  
12151215  
12161216  
12171217  
12181218  
12191219  
12201220  
12211221  
12221222  
12231223  
12241224  
12251225  
12261226  
12271227  
12281228  
12291229  
12301230  
12311231  
12321232  
12331233  
12341234  
12351235  
12361236  
12371237  
12381238  
12391239  
12401240  
12411241  
12421242  
12431243  
12441244  
12451245  
12461246  
12471247  
12481248  
12491249  
12501250  
12511251  
12521252  
12531253  
12541254  
12551255  
12561256  
12571257  
12581258  
12591259  
12601260  
12611261  
12621262  
12631263  
12641264  
12651265  
12661266  
12671267  
12681268  
12691269  
12701270  
12711271  
12721272  
12731273  
12741274  
12751275  
12761276  
12771277  
12781278  
12791279  
12801280  
12811281  
12821282  
12831283  
12841284  
12851285  
12861286  
12871287  
12881288  
12891289  
12901290  
12911291  
12921292  
12931293  
12941294  
12951295  
12961296  
12971297  
12981298  
12991299  
13001300  
13011301  
13021302  
13031303  
13041304  
13051305  
13061306  
13071307  
13081308  
13091309  
13101310  
13111311  
13121312  
13131313  
13141314  
13151315  
13161316  
13171317  
13181318  
13191319  
13201320  
13211321  
13221322  
13231323  
13241324  
13251325  
13261326  
13271327  
13281328  
13291329  
13301330  
13311331  
13321332  
13331333  
13341334  
13351335  
13361336  
13371337  
13381338  
13391339  
13401340  
13411341  
13421342  
13431343  
13441344  
13451345  
13461346  
13471347  
13481348  
13491349  
13501350  
13511351  
13521352  
13531353  
13541354  
13551355  
13561356  
13571357  
13581358  
13591359  
13601360  
13611361  
13621362  
13631363  
13641364  
13651365  
13661366  
13671367  
13681368  
13691369  
13701370  
13711371  
13721372  
13731373  
13741374  
13751375  
13761376  
13771377  
13781378  
13791379  
13801380  
13811381  
13821382  
13831383  
13841384  
13851385  
13861386  
13871387  
13881388  
13891389  
13901390  
13911391  
13921392  
13931393  
13941394  
13951395  
13961396  
13971397  
13981398  
13991399  
14001400  
14011401  
14021402  
14031403  
14041404  
14051405  
14061406  
14071407  
14081408  
14091409  
14101410  
14111411  
14121412  
14131413  
14141414  
14151415  
14161416  
14171417  
14181418  
14191419  
14201420  
14211421  
14221422  
14231423  
14241424  
14251425  
14261426  
14271427  
14281428  
14291429  
14301430  
14311431  
14321432  
14331433  
14341434  
14351435  
14361436  
14371437  
14381438  
14391439  
14401440  
14411441  
14421442  
14431443  
14441444  
14451445  
14461446  
14471447  
1448